


RECESSED AIR CURTAIN


SIMPLE MODELS

ELECTRICALLY HEATED MODELS

WATER HEATED MODELS

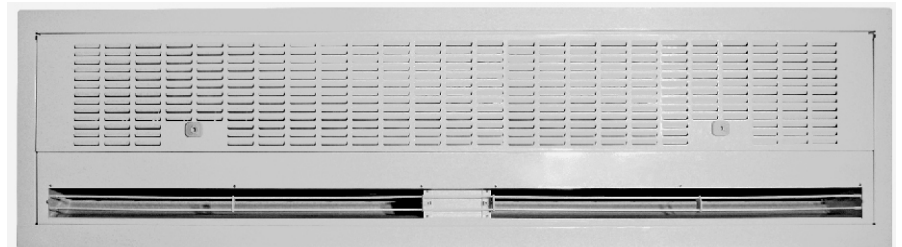

- "NEW LOGIG" SYSTEM IS USED
- 15 DIFFERENT SPEEDS
- AIR CURTAIN NETWORK CONNECTION WITH 1 "MASTER" UNIT UP TO 240 "SLAVES" UNITS
- ROOM THERMOSTAT AND DOOR SWITCH INPUTS
- WIRED AND INFRARED REMOTE CONTROL

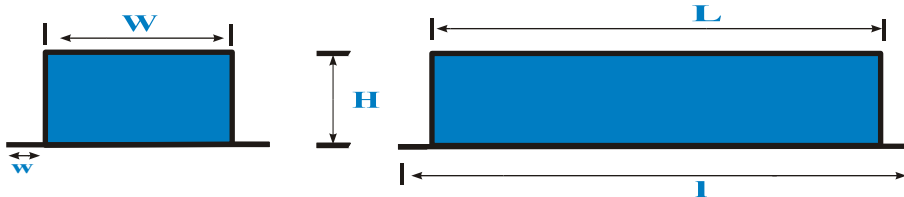

FAN DIAMETER 120 mm



	RS-34	RS-35	RS-36	RS-37	RS-38
Max door width (m)	1,2	1,4	1,6	1,8	2,0
Max door height (m)	4,0	4,0	4,0	4,0	4,0
Outlet velocity (m/sec)	11.0*	11.0*	11.0*	11.0*	11.0*
Air volume (m³/h)	2600	3110	3620	4130	4632
Motor power (W)	660	660	660	660	660
	12	12	12	12	12
Noise level in 1 m (dB(A))	66/64	66/64	66/64	67/64	67/64
L: Total length (mm)	1255	1455	1655	1855	2055
W: Total width (mm)	403	403	403	403	403
H: Height (mm)	233	233	233	233	233
l: Outlet length (mm)	1355	1555	1755	1955	2155
w: Frame width (mm)	50	50	50	50	50
Weight (Kgr)	34	36	38	41.5	45
Power supply (V/Hz/N~)	230/50/1	230/50/1	230/50/1	230/50/1	230/50/1
Motor speed (rpm)	1370/1050	1370/1050	1370/1050	1370/1050	1370/1050
Ingress Protection	IP20	IP20	IP20	IP20	IP20
Motor side	middle	middle	middle	middle	middle
Remote control panel	+	+	+	+	+
Infrared control panel	+	+	+	+	+

HIGH SPEED CHARACTERISTICS FOR RECESSED AIR CURTAINS

* 15 SPEED RANGE

